

SPECIFICATION

Quality		: TATU & TATULINES
Product Definition		: Tufted Loop Pile
Gauge		: 1/10"
No. Of Tufts	ISO 1763	: $\pm 168.000/m^2$
Pile Fibre		: 100 % Polypropylene
Pile Weight		: $400 \text{ gr}/m^2 \pm 5 \%$
Pile Height	ISO 1766	: $3 \text{ mm} \pm 5 \%$
Primary Backing		: PA/PES non-woven
Tile Backing		: Polyflex with a non-woven fabric
Total Thickness	ISO 1765	: $6 \text{ mm} \pm 5 \%$
Total Weight		: $3790 \text{ gr}/m^2 \pm 7,5 \%$
Tile Size		: $50 \times 50 \text{ cm} (\pm 19.7" \times 19.7")$
Tiles Per Box		: 20

PERFORMANCE

Use Classification		: Light Contract Class 22
Abrasion	DIN 54322	: Pass
Vettermann Test	DIN 54323	: Pass
Dimensional Stability	NEN 6160	: Pass
Thermal Isolation	ISO 8302	: $0.10 \text{ m}^2 \text{ K/W}$

ELECTROSTATIC PROPERTIES


Static Loading		: Anti-Static
----------------	--	---------------

FLAME PROPERTIES

Hot Metal Nut Test	BS 4790	: Low Radius
--------------------	---------	--------------

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: 4.4
Rubbing, Dry	ISO 105 X12	: 5.0
Rubbing, Wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.8
Water	ISO 105 E01	: 4.8

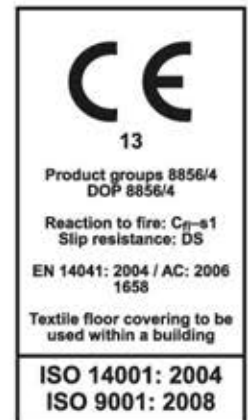

GENERAL

Recommended Maintenance : Best results are obtained when cleaned a with dry shampoo method.
Pile Direction : Directional arrows are printed on the back of each tile.
 Best results are obtained when laid checkerboard.

Laying Instructions : Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

MADE IN HOLLAND